

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of Douglas Claffey, Paul Graziani and Deron Ohlarik

Serial No.: Not yet assigned Group Art Unit:

Filed: Herewith Examiner:

For: **METHOD AND APPARATUS FOR DETERMINING OBSCURATION OF SENSORS THAT ARE MOUNTED ON A SPACECRAFT**

Assistant Commissioner for Patents
Box PATENT APPLICATION
Washington, D.C. 20231


Dear Sir:

Enclosed please find the following:

1. Specification, abstract and claims (9 independent, 26 dependent, 35 total) (29 pages);
2. Formal drawings (2 figures, 2 sheets);
3. Declaration and Power of Attorney;
4. Assignment with Recordation Sheet;
5. Verified Statement Claiming Small Entity Status - Independent Inventor;
6. Verified Statement Claiming Small Entity Status - Small Business Concern;
7. One check in the amount of \$789.00 (\$380.00 for filing fee, \$234.00 for excess independent claims, \$135.00 for excess claims and \$40.00 for filing assignment; and,
8. Certificate of Express mailing.

The Commissioner is hereby authorized to charge any fee deficiency, or credit any overpayment, to Deposit Account No. 18-1579. The Commissioner is also authorized to charge Deposit Account No. 18-1579 for any future fees connected in any way to this application. Two copies of this letter are enclosed.

Respectfully submitted,



Kevin L. Pontius, Esq.

Registration No. 37,512

Roberts Abokhair & Mardula, LLC

11800 Sunrise Valley Drive, Suite 1000

Reston, VA 20191-5302

(703) 391-2900

**VERIFIED STATEMENT CLAIMING SMALL ENTITY STATUS
(37 CFR 1.9(f) & 1.27(b))--INDEPENDENT INVENTOR**

Docket Number (Optional)

Applicant or Patentee: Douglas Claffey, Paul Graziani and Deron OhlarikSerial or Patent No.: Not Yet IssuedFiled or Issued: HerewithTitle: Method and Apparatus for Determining Obscuration of Sensors That Are Mounted on a Spacecraft

As a below named inventor, I hereby declare that I qualify as an independent inventor as defined in 37 CFR 1.9(c) for purposes of paying reduced fees to the Patent and Trademark Office described in:

- ☐ the specification filed herewith with title as listed above.
- ☒ the application identified above.
- ☐ the patent identified above.

I have not assigned, granted, conveyed or licensed and am under no obligation under convey or law to assign, grant, convey or license, any rights in the invention to any person who would not qualify as an independent inventor under 37 CFR 1.9(c) if that had made the invention, or to any concern which would not qualify as a business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(c).

Each person, concern or organization to which I have assigned, granted, conveyed, or licensed or am under an obligation under contract or law to assign, grant, convey, or license any rights in the invention is listed below:


- ☐ No such person, concern, or organization exists.
- ☐ Each such person, concern or organization is listed below.

Separate verified statements are required from each named person, concern or organization having rights to the invention averring to their status as small entities. (37 CFR 1.27)

I acknowledge the duty to file in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 128(b))


I hereby declare that all statements made herein of my own knowledge are true and that all statements made an information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

Douglas Claffey
NAME OF INVENTOR


Signature of inventor


6-10-99
Date

Paul Graziani
NAME OF INVENTOR


Signature of inventor

6-11-99
Date

Deron Ohlarik
NAME OF INVENTOR


Signature of inventor

6-10-99
Date

VERIFIED STATEMENT CLAIMING SMALL ENTITY STATUS
(37 CFR 1.9(f) & 1.27(c))--SMALL BUSINESS CONCERN

Docket Number (Optional)

Applicant or Patentee: Douglas Claffey, Paul Graziani and Deron Ohlarik
 Serial or Patent No.: Not Yet Issued
 Filed or Issued: Herewith
 Title: Method and Apparatus for Determining Obscuration of Sensors That Are Mounted on a Spacecraft

I hereby declare that I am

- ☐ the owner of the small business concern identified below:
☒ an official of the small business concern empowered to act on behalf of the concern identified below:

NAME OF SMALL BUSINESS CONCERN Analytical Graphics, Inc.
 ADDRESS OF SMALL BUSINESS CONCERN 325 Technology Drive, Malvern, PA 19355

I hereby declare that the above identified small business concern qualifies as a small business concern as defined in 13 CFR 121.12, and reproduced in 37 CFR 1.9(d), for purposes of paying reduced fees to the United States Patent and Trademark Office, in that the number of employees of the concern, including those of its affiliates, does not exceed 500 persons. For purposes of this statement, (1) the number of employees of the business concern is the average over the previous fiscal year of the concern of the persons employed on a full-time, part-time or temporary basis during each of the pay periods of the fiscal year, and (2) concerns are affiliates of each other when either, directly or indirectly, one concern controls or has the power to control the other, or a third party or parties controls or has the power to control both.

I hereby declare that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention described in:

- ☐ the specification filed herewith with title as listed above.
☒ the application identified above.
☐ the patent identified above.

If the rights held by the above identified small business concern are not exclusive, each individual, concern or organization having rights in the invention must file separate verified statements averring to their status as small entities, and no rights to the invention are held by any person, other than the inventor, who would not qualify as an independent inventor under 37 CFR 1.9(c) if that person made the invention, or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d), or a nonprofit organization under 37 CFR 1.9(e).

Each person, concern, or organization having any rights in the invention is listed below:

- ☒ no such person, concern or organization exists.
☐ each such person, concern or organization is listed below.

Separate verified statements are required from each named person, concern or organization having rights to the invention averring to their status as small entities. (37 CFR 1.27).

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlements to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate (37 CFR 1.289(b))

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

NAME OF PERSON SIGNING Paul Graziani
 TITLE OF PERSON IF OTHER THAN OWNER President
 ADDRESS OF PERSON SIGNING 325 Technology Drive, Malvern, PA 19355
 SIGNATURE Paul L. Graziani DATE 6-11-99

06/14/99 1c573 U.S. PTO

Title: **METHOD AND APPARATUS FOR DETERMINING OBSCURATION
OF SENSORS THAT ARE MOUNTED ON A SPACECRAFT**

Inventors: Douglas Claffey, Paul Graziani, and Deron Ohlarik

5

BACKGROUND OF THE INVENTION

1. Field of the Invention

This invention relates generally to the field of spacecraft analysis, design, and operation. More specifically, this invention relates to a method and corresponding apparatus for use in planning and execution of operations using sensors mounted on a spacecraft.

2. Background Art

A typical Earth satellite or lunar or interplanetary probe has a number of objects attached to its exterior and protruding from it to varying degrees. Such objects include various types of sensors, communications antennas, thrusters, solar power panels and the like, as well as the frameworks and beams on which such objects may be mounted. Other, unintended protrusions from the spacecraft body can result from such phenomena as the partial separation of shielding material from the outer shell of the spacecraft. Conversely, a previously existing protrusion can be eliminated, as, for example, when a solar panel is lost. In addition, the body of the spacecraft itself may take on a wide variety of shapes that are often irregular.

Thus, depending on how a spacecraft-mounted sensor is attached and oriented, its field of view may be obscured (partially or totally) by the spacecraft and the objects protruding from it. Moreover, depending on the sensor's target, its field of view may be

obscured by the central body around which it is orbiting (typically the Earth) or another celestial body, such as the Sun or the Moon.

Thus, an important question in spacecraft operations is the extent to which a sensor with a given assigned target is subject to obscuration at various times during the parent spacecraft's orbit or trajectory. The answer to this question can be useful for planning purposes, since it can provide the basis for selecting the optimal times for certain sensing activities. Knowing the extent to which a sensor's field of view is obscured at different times, one can schedule maneuvers to change the attitude or orbit characteristics of the spacecraft to reduce or eliminate the obscuration. Information on obscuration can also play a role in spacecraft design, since it may be possible to place the various objects on the exterior of the spacecraft in such a way as to reduce or eliminate obscuration of its sensors' fields of view.

A related invention is that disclosed in U.S. Patent no. 5,864,489 for Method and Apparatus for Determining Exposure of Spacecraft-Mounted Solar Panels to Sun and Determination of Spacecraft Drag, which is incorporated herein by reference in its entirety.

Prior methods for calculation of sensor obscuration are accomplished only by performing complex and time-consuming mathematical operations on extensive data regarding the spacecraft's orbit or trajectory, its attitude, desired times for image capture, and other factors. Moreover, while this process may yield numerical data relating the obscuration level to time, it does not provide an easy and reliable way of modeling the data visually, to facilitate the development of alternative designs to minimize the amount of obscuration.

To overcome the shortcomings of the current approach, a method and apparatus are needed that will yield quick and reliable calculations of the degree of obscuration and, at the same time, allow for visual presentation, analysis, and modeling of the data to facilitate the design of alternatives that minimize obscuration of sensors.

5

SUMMARY OF THE INVENTION

In order to solve the above-noted sensor obscuration problems, the invention provides an apparatus, a method, and a computer program product for obscuration analysis, as well as a method and a computer program product for upgrading a satellite system analysis program. Methods or products according to the present invention may be embodied as signals propagated via a data transmission medium.

The present invention is preferably embodied as a software module that builds upon a satellite system analysis program that has animated three-dimensional visualization capabilities.

It is an object of the present invention to utilize the graphical output of the satellite system analysis program to determine the percentage of sensor obscuration over a given time interval.

It is an additional object of the present invention to provide for display of obscuration information, both numerically and in graphical form.

It is yet another object of the present invention to provide visualizations of sensor obscuration that enable mission planners and spacecraft designers to envision design alternatives that improve obscuration characteristics.

To accomplish some of the above objects, the present invention is embodied as a method for upgrading satellite system analysis software. One aspect of the software

upgrade embodiment is supplementing the available view perspectives for the satellite system analysis program so as to include a view from the sensor on the satellite, along the boresight of the sensor. A number of code segments are added to the software. One added code segment enables a user to select objects to be taken into account for obscuration analysis. Another added code segment simplifies visual display to show selected objects in a first color and unselected objects and background in a second color. A further added code segment assigns colors to a representation of the sensor pattern of the sensor object, so as to distinguish those portions of the sensor object's field of view that are obscured by selected objects from those portions of the sensor object's field of view that are not obscured by selected objects. Another code segment that is added to the software counts and records the quantity of pixels corresponding to obscured and unobscured portions of the sensor object's field of view at each of plural animation time steps. A code segment is also added via the upgrade method that calculates and reports to a user an obscuration percentage over a predetermined time period.

As another way to accomplish some of the above objects, the present invention is also embodied as a computer program product for upgrading satellite system analysis software. The computer program software upgrade product includes software instructions for enabling the computer to perform predetermined operations, and a computer readable medium embodying those software instructions. The predetermined operations include supplementing the available view perspectives for the satellite system analysis program so as to include a view from the sensor, along the boresight of the sensor, and adding a code segment to the satellite system analysis program that enables a user to select objects to be taken into account for obscuration analysis. The predetermined operations also include adding a code segment to the satellite system analysis program that simplifies visual

display to show selected objects in a first color and unselected objects and background in a second color, as well as adding a code segment to the satellite system analysis program that assigns colors to a representation of the sensor pattern of the sensor object, so as to distinguish those portions of the sensor object's field of view that are obscured by selected objects from those portions of the sensor object's field of view that are not obscured by selected objects. The predetermined operations further include adding a code segment to the satellite system analysis program that counts and records the quantity of pixels corresponding to obscured and unobscured portions of the sensor object's field of view at each of plural animation time steps, and adding a code segment to the satellite system analysis program that calculates and reports to a user an obscuration percentage over a predetermined time period.

As another way to accomplish some of the above objects, the present invention is also embodied as a method for analyzing sensor obscuration. The process includes the steps of animating a three-dimensional visualization of a satellite that includes a sensor object, the sensor object having a boresight and a sensor pattern, as well as selecting a view perspective from the sensor object along the boresight. The process further includes selecting objects of a satellite system analysis scenario that are capable of causing obscuration, and assigning a first color to the selected objects, while assigning a second color to unselected objects and background of the satellite system analysis scenario. The process also includes assigning a third color to the sensor pattern, such that, when the sensor pattern is superimposed over a visual display of the satellite system analysis scenario, portions of the sensor pattern that overlap with unselected objects and background appear in a different color than do portions of the sensor pattern that overlap with selected objects, as well as counting and recording the quantities of pixels of each

color in the sensor pattern, the counting and recording being carried out at each time step of animation of the satellite system analysis scenario. The process further includes providing a graphical display to a user, during the animation, portraying the amount of obscuration of the sensor pattern, and source of obscuration of the sensor pattern, over a predetermined time period, and calculating the percentage of obscuration over said predetermined time period on the basis of the recorded pixel quantities, the calculated percentage of obscuration being displayed to the user.

As another way to accomplish some of the above objects, the present invention is also embodied as a computer program product for analyzing sensor obscuration. The computer program product includes software instructions for enabling a computer to perform predetermined operations, and a computer readable medium embodying the software instructions. The predetermined operations correspond to the processes summarized above.

As another way to accomplish some of the above objects, the present invention is also embodied as a propagated signal for use in analyzing sensor obscuration. The signal is propagated via a data transmission medium. The propagated signal includes an animation signal segment that provides for animated three-dimensional visualization of a spacecraft having a sensor object, the sensor object having a boresight and a sensor pattern, as well as a perspective selection signal segment that provides for a visualization view from the perspective of said sensor object, along said sensor object's boresight. The propagated signal further includes a selection signal segment that enables selection of obscuring objects to be taken into account in the obscuration analysis, and a simplification signal segment that simplifies visual display provided by said animation code segment to show the selected obscuring objects in a first color and show unselected objects and

background in a second color. The propagated signal also includes a distinguishing signal segment that assigns a third color to portions of the sensor object's field of view that are obscured by the selected obscuring objects and a fourth color to those portions of the sensor object's field of view that are not obscured, to thereby distinguish obscured portions of the sensor object's field of view from unobscured portions of the sensor object's field of view, as well as a quantifying signal segment that counts and records a quantity of pixels corresponding to obscured portions of the sensor object's field of view at each of plural animation time steps, and that counts and records a quantity of pixels corresponding to unobscured portions of the sensor object's field of view at each of the plural animation time steps. The propagated signal also includes a results signal segment that calculates, based on the quantities of pixels counted and recorded by said quantifying code segment, and reports to a user percent obscuration of the sensor object's field of view over a predetermined time period.

As another way to accomplish some of the above objects, the present invention is also embodied as an apparatus for analyzing sensor obscuration. The apparatus preferably takes the form of a general purpose computer that implements a method according the present invention. The general purpose computer has a processor, and a memory embodying software instructions that are adapted to enable the computer to perform operations. The operations performed correspond to a method according to the present invention, summarized above.

The present invention requires the addition of a new view perspective to those previously available, that new view being from the sensor along its boresight.

Another aspect of the invention is that it also includes a translational mechanism that causes the sensor pattern to be projected from the edges rather than from the center of the sensor object.

BRIEF DESCRIPTION OF THE DRAWINGS

Other objects and advantages of the invention will be understood as the invention is explained in detail, below, with reference to the attached drawings:

Fig. 1 illustrates a flow chart diagram of the software upgrade method aspect of the present invention.

Fig. 2 illustrates a flow chart diagram of the obscuration analysis method aspect of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

The present invention utilizes the graphical output of a satellite systems analysis program featuring high-resolution, three-dimensional, animated images of spacecraft, celestial bodies and other objects in the space environment. An example of such a satellite systems analysis program is the Satellite Tool Kit/Visualization Option (STK/VO) created by Analytical Graphics, Inc. of Malvern, Pennsylvania. STK/VO allows the user to select from a number of view perspectives -- such as satellite to Earth, satellite A to satellite B, facility to satellite, etc. -- depending on how many objects there are in the satellite system analysis scenario. Copyright registrations for three versions of the Satellite Took Kit systems analysis program, cert. nos. TX4-819-009, TX4-819-010, and TX4-819-011, are hereby incorporated by reference in their entirety.

The present invention includes the addition of a new view perspective to those previously available, that new view being from the sensor along its boresight. The boresight of a sensor is defined as the central axis of the sensor's field of view.

Another aspect of the invention is that it also includes a translational mechanism that causes the sensor pattern to be projected from the edges rather than from the center of the sensor object. The sensor pattern of a sensor is the spherical projection of what area may be imaged with the sensor's field of view. The sensor's field of view is the cone (typically circular, but generally having a directrix of any shape) defining what space may be sensed by the sensor at a given orientation and position. The vertex of the cone defining the sensor's field of view is located at or slightly behind the sensor.

Since there may be many objects in a typical satellite system analysis scenario, only some of which are potential sources of obscuration in a given case, the present invention provides a means of selecting those potentially interfering objects and factoring out others to be treated as background. This is manifested visually by simplifying the display (exclusive of the sensor pattern) to show relevant objects in one color, such as black, and background objects in another, such as white. When the sensor pattern, which is assigned a third color, is superimposed on the simplified display, portions of the sensor pattern that do not overlap with relevant objects—representing portions of the sensor's field of view that are unobscured—take on a different color than those that do overlap with such objects. For example, if relevant objects and background are assigned the colors black and white, respectively, a blue sensor pattern will turn yellow via the bitwise “exclusive or” operation in areas where there is no overlap with relevant (i.e., obscuring) objects and remain blue where there is such overlap.

The present invention counts and records the quantity of pixels in the sensor pattern of each color. Pixels near the edge of the view window are given reduced weight to compensate for the fact that the screen is flat, while the sensor pattern is spherical. When the scenario is animated, such a pixel count is carried out at each animation time step until the animation terminates. At the conclusion of the animation, the percentage of the sensor's field of view subject to obscuration can be computed over time, based on the pixel counts. This information can be presented via reports consisting of tables of numerical data or via graphs automatically generated by the program. According to a preferred embodiment, a graphical display of a histogram of percentage obscuration over the course of the animation is generated and displayed.

In addition, the user can observe changes in the display window over the course of the animation to get a general idea of the amount of obscuration over the time period and the identity of the object or objects causing the obscuration.

The software upgrade aspect of the present invention (refer to Fig. 1) makes modifications of a satellite system analysis program that does animated three-dimensional visualization **101**. An important part of the upgrade is to add a software module **102** to the program **101** that provides for a view perspective from one of the satellite's sensors along the sensor's boresight. Another aspect of the upgrade is to add a software module **104** that provides fore the option of projecting the sensor pattern from the edges rather than from the center of the sensor object. A software module **106** is added that provides for selecting which objects are to be taken into account in the obscuration analysis. As examples, the satellite itself, things protruding from the satellite, the central body about which the satellite orbits, and other celestial bodies (i.e., other than the central body) would typically be selected as potentially obscuring objects for purposes of the obscuration analysis.

After obscuring objects are selected via the object selection software module **106**, a software module **108** is added for simplifying the visual display to show the selected objects in one color and unselected objects and background in another color. A color assignment software module **110** is added that assigns colors to the visual representation of the sensor pattern to distinguish portions of the field of view that are obscured by the selected objects from those portions of the field of view that are not obscured.

Further, a software module **112** is added that generates pixel statistics by counting and recording of the quantities of pixels corresponding to obscured and unobscured portions of the sensor's field of view, at each of the program's animation time steps. Also, an obscuration calculation software module **114** is added that calculates and reports obscuration percentages over a specified time period, based on the statistics generated by the generation of pixel statistics software module **112**.

All the added software modules are embodied, along with the satellite system analysis program that does animated three-dimensional visualization, in memory **120** that is associated with a CPU **130** of a general purpose computer (not shown). The results generated by the above described software are provided to the user via a display **150** and/or a printer **140**.

Utilizing a satellite systems analysis program with animated three-dimensional visualization, modified as described above, the invention comprises a method (refer to Fig. 2) in which:

1. a view perspective from a sensor object along its boresight is selected **204**;
2. the projection of the sensor pattern is translated **206** so that it projects from the edges rather than the center of the sensor object;

3. relevant objects of the satellite system analysis scenario—i.e. those capable of causing obscuration—are selected **208**;
4. a color is assigned **210** to the relevant objects, while another color is assigned **212** to irrelevant objects and background;
5. a third color is assigned to the sensor pattern, such that, when the sensor pattern is superimposed over the objects in the visual display, portions of the sensor pattern that overlap with irrelevant objects and background appear in a different (i.e., fourth) color **216** than those portions that overlap with relevant objects **214**;
6. the quantity of pixels of each color in the sensor pattern is counted and recorded **218**, with pixels near the edge of the view window given a reduced weight to compensate for the fact that the screen is flat, whereas the sensor pattern is spherical;
7. the satellite system analysis scenario is animated, with a count of the pixels of each color in the sensor pattern carried out at each time step **220, 222, 218**;
8. during the animation, a graphical display provides the user with a general idea of the amount and source(s) of obscuration during the time period;
9. at the conclusion of the animation, the percentage of obscuration over time is calculated on the basis of the pixel counts and presented in numerical and/or graphical form **224**;
10. the output of the program is used for planning missions to avoid sensing activities during periods of excessive obscuration and/or to schedule maneuvers to eliminate or reduce obscuration;
11. the visual display is observed for the purpose of determining whether spacecraft design changes, such as the re-positioning of objects attached to the spacecraft, can eliminate or reduce obscuration.

The present invention is intended to encompass other variations in which multiple colors are assigned to relevant objects to distinguish, e.g., between the spacecraft and the central body and/or among various objects attached to the spacecraft, so that the source(s) of the obscuration can be more precisely determined.

5

The present invention has been described in terms of a preferred embodiment. However, it will be appreciated by those of skill in the art that numerous improvements and modifications may be made to the described embodiment without departing from the scope of the invention. The scope of the invention is limited only by the appended claims.

WHAT IS CLAIMED IS:

1 1. A process for sensor obscuration analysis, implemented via a programmable
2 machine, the process comprising:
3 animating a three-dimensional visualization of a satellite that includes a sensor
4 object, the sensor object having a boresight and a sensor pattern;
5 selecting a view perspective from the sensor object along the boresight;
6 selecting objects of a satellite system analysis scenario that are capable of causing
7 obscuration;
8 assigning a first color to the selected objects, while assigning a second color to
9 unselected objects and background of the satellite system analysis scenario;
10 assigning a third color to the sensor pattern, such that, when the sensor pattern is
11 superimposed over a visual display of the satellite system analysis scenario, portions of the
12 sensor pattern that overlap with unselected objects and background appear in a different
13 color than do portions of the sensor pattern that overlap with selected objects;
14 counting and recording the quantities of pixels of each color in the sensor pattern,
15 the counting and recording being carried out at each time step of animation of the satellite
16 system analysis scenario;
17 providing a graphical display to a user, during the animation, portraying the
18 amount of obscuration of the sensor pattern, and source of obscuration of the sensor
19 pattern, over a predetermined time period; and
20 calculating the percentage of obscuration over said predetermined time period on
21 the basis of the recorded pixel quantities, the calculated percentage of obscuration being
22 displayed to a user.

1 2. The process for sensor obscuration analysis of claim 1, the process further
2 comprising:

3 translating a projection of the sensor pattern so that the sensor pattern is projected
4 from edges of the sensor object.

1 3. The process for sensor obscuration analysis of claim 1, wherein the graphical
2 display and the displayed calculated percentage of obscuration is used for planning
3 missions to avoid sensing activities during periods of excessive obscuration.

1 4. The process of sensor obscuration analysis of claim 1, wherein the graphical
2 display and the displayed calculated percentage of obscuration is used for planning
3 missions to schedule maneuvers to eliminate or reduce obscuration.

1 5. The process of sensor obscuration analysis of claim 1, wherein the graphical
2 display and the displayed calculated percentage of obscuration is used for the purpose of
3 determining whether re-positioning of objects attached to the satellite can eliminate or
4 reduce obscuration.

1 6. The process of sensor obscuration analysis of claim 1, wherein the counting and
2 recording of pixels is carried out such that pixels near the edge of the sensor pattern are
3 given a reduced weight to compensate for the fact that a display screen of the
4 programmable machine is flat, while the sensor pattern is spherical.

1 7. A method of analyzing sensor obscuration using a satellite system analysis
2 program having animated three-dimensional visualization of a satellite that includes a
3 sensor object, the sensor object having a boresight and a sensor pattern, the method
4 comprising:

5 selecting a view perspective from the sensor object along the boresight;
6 selecting objects of a satellite system analysis scenario that are capable of causing
7 obscuration;
8 assigning a first color to the selected objects, while assigning a second color to
9 unselected objects and background of the satellite system analysis scenario;
10 assigning a third color to the sensor pattern, such that, when the sensor pattern is
11 superimposed over a visual display of the satellite system analysis scenario, portions of the
12 sensor pattern that overlap with unselected objects and background appear in a different
13 color than do portions of the sensor pattern that overlap with selected objects;
14 counting and recording the quantities of pixels of each color in the sensor pattern,
15 the counting and recording being carried out at each time step of animation of the satellite
16 system analysis scenario;
17 providing a graphical display to a user, during the animation, portraying the
18 amount of obscuration of the sensor pattern, and source of obscuration of the sensor
19 pattern, over a predetermined time period; and
20 calculating the percentage of obscuration over said predetermined time period on
21 the basis of the recorded pixel quantities, the calculated percentage of obscuration being
22 displayed to the user.

1 8. The method of analyzing sensor obscuration of claim 7, the method further
2 comprising:

3 translating a projection of the sensor pattern so that the sensor pattern is projected
4 from edges of the sensor object.

1 9. The method of analyzing sensor obscuration of claim 7, wherein the graphical
2 display and the displayed calculated percentage of obscuration is used for planning
3 missions to avoid sensing activities during periods of excessive obscuration.

1 10. The method of analyzing sensor obscuration of claim 7, wherein the graphical
2 display and the displayed calculated percentage of obscuration is used for planning
3 missions to schedule maneuvers to eliminate or reduce obscuration.

1 11. The method of analyzing sensor obscuration of claim 7, wherein the graphical
2 display and the displayed calculated percentage of obscuration is used for the purpose of
3 determining whether re-positioning of objects attached to the satellite can eliminate or
4 reduce obscuration.

1 12. The method of analyzing sensor obscuration of claim 7, wherein the counting
2 and recording of pixels is carried out such that pixels near the edge of the sensor pattern
3 are given a reduced weight to compensate for the fact that a display screen is flat, while
4 the sensor pattern is spherical.

1 13. A computer program product for enabling a computer to perform analysis of
2 sensor obscuration, the computer program product comprising:
3 software instructions for enabling the computer to perform predetermined operations, and
4 a computer readable medium embodying the software instructions;
5 the predetermined operations comprising:
6 animating a three-dimensional visualization of a satellite that includes a sensor object,
7 the sensor object having a boresight and a sensor pattern;
8 selecting a view perspective from the sensor object along the boresight;

9 selecting objects of a satellite system analysis scenario that are capable of causing
10 obscuration;
11 assigning a first color to the selected objects, while assigning a second color to
12 unselected objects and background of the satellite system analysis scenario;
13 assigning a third color to the sensor pattern, such that, when the sensor pattern is
14 superimposed over a visual display of the satellite system analysis scenario,
15 portions of the sensor pattern that overlap with unselected objects and background
16 appear in a different color than do portions of the sensor pattern that overlap with
17 selected objects;
18 counting and recording the quantities of pixels of each color in the sensor pattern, the
19 counting and recording being carried out at each time step of animation of the
20 satellite system analysis scenario;
21 providing a graphical display to a user, during the animation, portraying the amount of
22 obscuration of the sensor pattern, and source of obscuration of the sensor pattern,
23 over a predetermined time period; and
24 calculating the percentage of obscuration over said predetermined time period on the
25 basis of the recorded pixel quantities, the calculated percentage of obscuration
26 being displayed to the user.

1 14. The computer program product of claim 13, the predetermined operations
2 further comprising:
3 translating a projection of the sensor pattern so that the sensor pattern is projected
4 from edges of the sensor object.

1 15. The computer program product of claim 13, wherein the graphical display and
2 the displayed calculated percentage of obscuration is used for planning missions to avoid
3 sensing activities during periods of excessive obscuration.

1 16. The computer program product of claim 13, wherein the graphical display and
2 the displayed calculated percentage of obscuration is used for planning missions to
3 schedule maneuvers to eliminate or reduce obscuration.

1 17. The computer program product of claim 13, wherein the graphical display and
2 the displayed calculated percentage of obscuration is used for the purpose of determining
3 whether re-positioning of objects attached to the satellite can eliminate or reduce
4 obscuration.

1 18. The computer program product of claim 13, wherein the counting and
2 recording of pixels is carried out such that pixels near the edge of the sensor pattern are
3 given a reduced weight to compensate for the fact that a display screen of the
4 programmable machine is flat, while the sensor pattern is spherical.

1 19. A sensor obscuration analysis computer program product, which has a
2 computer program stored on a machine-readable medium, the computer program
3 comprising:

4 an animation code segment providing for animated three-dimensional visualization
5 of a spacecraft having a sensor object, the sensor object having a boresight and a sensor
6 pattern;

7 a perspective selection code segment providing for a visualization view from the
8 perspective of said sensor object, along said sensor object's boresight;

9 a selection code segment that enables selection of obscuring objects to be taken
10 into account in the obscuration analysis;

11 a simplification code segment that simplifies visual display provided by said
12 animation code segment to show the selected obscuring objects in a first color and show
13 unselected objects and background in a second color;

14 a distinguishing code segment that assigns a third color to portions of the sensor
15 object's field of view that are obscured by the selected obscuring objects and a fourth
16 color to those portions of the sensor object's field of view that are not obscured, to thereby
17 distinguish obscured portions of the sensor object's field of view from unobscured
18 portions of the sensor object's field of view;

19 a quantifying code segment that counts and records a quantity of pixels
20 corresponding to obscured portions of the sensor object's field of view at each of plural
21 animation time steps, and that counts and records a quantity of pixels corresponding to
22 unobscured portions of the sensor object's field of view at each of the plural animation
23 time steps; and

24 a results code segment that calculates, based on the quantities of pixels counted
25 and recorded by said quantifying code segment, and reports to a user percent obscuration
26 of the sensor object's field of view over a predetermined time period.

1 20. The sensor obscuration analysis computer program product of claim 19, the
2 computer program further comprising:

3 a projection code segment that projects said sensor pattern from edges of said
4 sensor object.

1 21. The sensor obscuration analysis computer program product of claim 19, said
2 obscuring objects being selected from the group consisting of: said spacecraft, protrusions
3 from said spacecraft, a central body about which said spacecraft orbits, and celestial
4 bodies.

1 22. The sensor obscuration analysis computer program product of claim 19, said
2 distinguishing code segment including code for determining portions of the sensor object's
3 field of view that are obscured by the selected obscuring objects by comparing said sensor
4 pattern with the selected obscuring objects.

1 23. A propagated signal for use in sensor obscuration analysis, the signal being
2 propagated via a data transmission medium, the propagated signal comprising:

3 an animation signal segment providing for animated three-dimensional
4 visualization of a spacecraft having a sensor object, the sensor object having a boresight
5 and a sensor pattern;

6 a perspective selection signal segment providing for a visualization view from the
7 perspective of said sensor object, along said sensor object's boresight;

8 a selection signal segment that enables selection of obscuring objects to be taken
9 into account in the obscuration analysis;

10 a simplification signal segment that simplifies visual display provided by said
11 animation code segment to show the selected obscuring objects in a first color and show
12 unselected objects and background in a second color;

13 a distinguishing signal segment that assigns a third color to portions of the sensor
14 object's field of view that are obscured by the selected obscuring objects and a fourth
15 color to those portions of the sensor object's field of view that are not obscured, to thereby

16 distinguish obscured portions of the sensor object's field of view from unobscured
17 portions of the sensor object's field of view;

18 a quantifying signal segment that counts and records a quantity of pixels
19 corresponding to obscured portions of the sensor object's field of view at each of plural
20 animation time steps, and that counts and records a quantity of pixels corresponding to
21 unobscured portions of the sensor object's field of view at each of the plural animation
22 time steps; and

23 a results signal segment that calculates, based on the quantities of pixels counted
24 and recorded by said quantifying code segment, and reports to a user percent obscuration
25 of the sensor object's field of view over a predetermined time period.

1 24. The propagated signal for use in sensor obscuration analysis of claim 23, the
2 propagated signal further comprising:

3 a projection signal segment that projects said sensor pattern from edges of said
4 sensor object.

5 25. A computer system adapted to analyze sensor obscuration, comprising:
6 a processor, and
7 a memory including software instructions adapted to enable the computer system
8 to perform operations comprising:
9 animating a three-dimensional visualization of a satellite that includes a sensor object,
the sensor object having a boresight and a sensor pattern;
selecting a view perspective from the sensor object along the boresight;
selecting objects of a satellite system analysis scenario that are capable of causing
obscuration;

10 assigning a first color to the selected objects, while assigning a second color to
11 unselected objects and background of the satellite system analysis scenario;
12 assigning a third color to the sensor pattern, such that, when the sensor pattern is
13 superimposed over a visual display of the satellite system analysis scenario,
14 portions of the sensor pattern that overlap with unselected objects and background
15 appear in a different color than do portions of the sensor pattern that overlap with
16 selected objects;
17 counting and recording the quantities of pixels of each color in the sensor pattern, the
18 counting and recording being carried out at each time step of animation of the
19 satellite system analysis scenario;
20 providing a graphical display to a user, during the animation, portraying the amount of
21 obscuration of the sensor pattern, and source of obscuration of the sensor pattern,
22 over a predetermined time period; and
23 calculating the percentage of obscuration over said predetermined time period on the
24 basis of the recorded pixel quantities, the calculated percentage of obscuration
25 being displayed to the user.

1 26. The computer system adapted to analyze sensor obscuration of claim 25, said
2 software instructions included in the memory being further adapted to enable the computer
3 system to perform operations comprising:
4 translating a projection of the sensor pattern so that the sensor pattern is projected
5 from edges of the sensor object.

1 27. Apparatus for analyzing sensor obscuration using a satellite system analysis
2 program having animated three-dimensional visualization of a satellite that includes a

3 sensor object, the sensor object having a boresight and a sensor pattern, the apparatus
4 comprising:

5 means for selecting a view perspective from the sensor object along the boresight;

6 means for selecting objects of a satellite system analysis scenario that are capable
7 of causing obscuration;

8 means for assigning a first color to the selected objects, while assigning a second
9 color to unselected objects and background of the satellite system analysis scenario;

10 means for assigning a third color to the sensor pattern, such that, when the sensor
11 pattern is superimposed over a visual display of the satellite system analysis scenario,
12 portions of the sensor pattern that overlap with unselected objects and background appear
13 in a different color than do portions of the sensor pattern that overlap with selected
14 objects;

15 means for counting and recording the quantities of pixels of each color in the
16 sensor pattern, the counting and recording being carried out at each time step of animation
17 of the satellite system analysis scenario;

18 means for providing a graphical display to a user, during the animation, portraying
19 the amount of obscuration of the sensor pattern, and source of obscuration of the sensor
20 pattern, over a predetermined time period; and

21 means for calculating the percentage of obscuration over said predetermined time
22 period on the basis of the recorded pixel quantities, the calculated percentage of
23 obscuration being displayed to the user.

1 28. The apparatus for analyzing sensor obscuration of claim 27, further
2 comprising:

3 means for translating a projection of the sensor pattern so that the sensor pattern is
4 projected from edges of the sensor object.

1 29. The apparatus for analyzing sensor obscuration of claim 27, wherein said
2 means for counting and recording of pixels operates such that pixels near the edge of the
3 sensor pattern are given a reduced weight to compensate for the fact that a display screen
4 is flat, while the sensor pattern is spherical.

1 30. A method of upgrading a satellite system analysis program that performs
2 animated three-dimensional visualization of a satellite, the satellite having a sensor object,
3 the sensor object having a sensor pattern and a boresight, the method comprising:

4 supplementing the available view perspectives for the satellite system analysis
5 program so as to include a view from the sensor, along the boresight of the sensor;

6 supplementing the satellite system analysis program with a code segment that
7 enables a user to select objects to be taken into account for analysis of obscuration of the
8 sensor pattern as viewed along the boresight of the sensor;

9 supplementing the satellite system analysis program with a code segment that
10 simplifies visual display, as viewed along the boresight of the sensor, to show selected
11 objects in a first color and unselected objects and background in a second color;

12 supplementing the satellite system analysis program with a code segment that
13 assigns colors to a representation of the sensor pattern of the sensor object, so as to
14 distinguish those portions of the sensor object's field of view that are obscured by selected
15 objects from those portions of the sensor object's field of view that are not obscured by
16 selected objects;

17 supplementing the satellite system analysis program with a code segment that
18 counts and records the quantity of pixels corresponding to obscured and unobscured
19 portions of the sensor object's field of view at each of plural animation time steps; and
20 supplementing the satellite system analysis program with a code segment that
21 calculates, based on recorded quantities of pixels corresponding to obscured and
22 unobscured portions of the sensor object's field of view at each of plural animation time
23 steps, an obscuration percentage over a predetermined time period, the results of the
24 calculations being reported to a user.

1 31. The method of upgrading a satellite system analysis program of claim 30,
2 wherein the objects to be taken into account for obscuration analysis are selected from the
3 group consisting of: the satellite, protrusions from the spacecraft, the central body about
4 which the satellite orbits, and celestial bodies.

1 32. The method of upgrading a satellite system analysis program of claim 30, the
2 method further comprising:

3 supplementing the satellite system analysis program with a translation option for
4 the sensor object that projects the sensor pattern from the edges of the sensor object.

1 33. A computer program product for enabling a computer to upgrade a satellite
2 system analysis program that performs animated three-dimensional visualization of a
3 satellite, the satellite having a sensor object, the sensor object having a sensor pattern and
4 a boresight, the computer program product comprising:
5 software instructions for enabling the computer to perform predetermined operations, and
6 a computer readable medium embodying the software instructions;
7 the predetermined operations comprising:

8 supplementing the available view perspectives for the satellite system analysis
9 program so as to include a view from the sensor, along the boresight of the sensor;
10 supplementing the satellite system analysis program with a code segment that enables
11 a user to select objects to be taken into account for analysis of obscuration of the
12 sensor pattern as viewed along the boresight of the sensor;
13 supplementing the satellite system analysis program with a code segment that
14 simplifies visual display, as viewed along the boresight of the sensor, to show
15 selected objects in a first color and unselected objects and background in a second
16 color;
17 supplementing the satellite system analysis program with a code segment that assigns
18 colors to a representation of the sensor pattern of the sensor object, so as to
19 distinguish those portions of the sensor object's field of view that are obscured by
20 selected objects from those portions of the sensor object's field of view that are not
21 obscured by selected objects;
22 supplementing the satellite system analysis program with a code segment that counts
23 and records the quantity of pixels corresponding to obscured and unobscured
24 portions of the sensor object's field of view at each of plural animation time steps;
25 and
26 supplementing the satellite system analysis program with a code segment that
27 calculates, based on recorded quantities of pixels corresponding to obscured and
28 unobscured portions of the sensor object's field of view at each of plural animation
29 time steps, an obscuration percentage over a predetermined time period, the results
30 of the calculations being reported to a user.

1 34. The computer program product for enabling a computer to upgrade a satellite
2 system analysis program recited in claim 33, wherein the objects to be taken into account
3 for obscuration analysis are selected from the group consisting of: the satellite,
4 protrusions from the spacecraft, the central body about which the satellite orbits, and
5 celestial bodies.

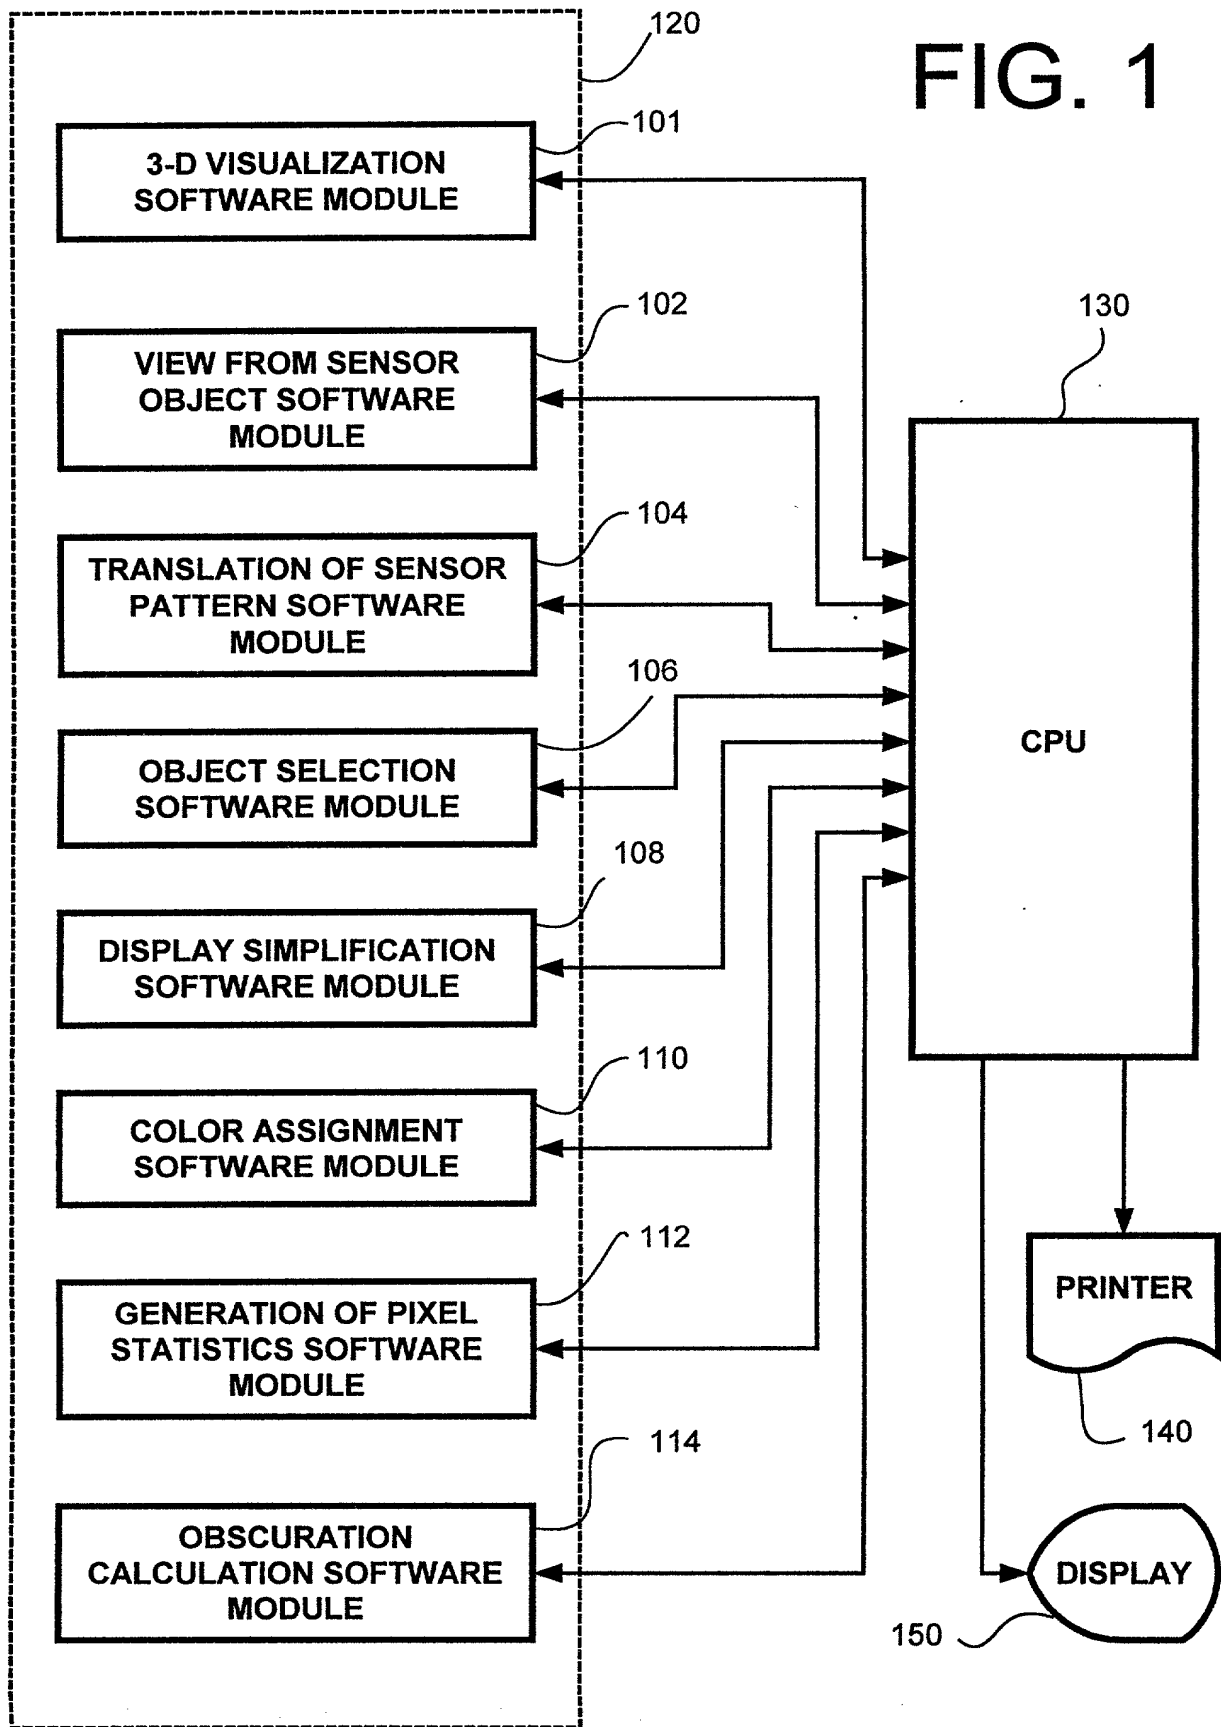
1 35. The computer program product for enabling a computer to upgrade a satellite
2 system analysis program recited in claim 33, the predetermined operations further
3 comprising:

4 supplementing the satellite system analysis program with a translation option for the
5 sensor object that projects the sensor pattern from the edges of the sensor object.

ABSTRACT OF THE DISCLOSURE

1 The field of view of a sensor mounted on a satellite (or other spacecraft) is
2 obscured by various objects, such as celestial bodies and the satellite's own solar panels.
3 A method is disclosed for visualizing and quantifying, with respect to time, variations in
4 the portions of the sensor's field of view that are obscured. The graphical output of a
5 satellite systems analysis program, which features high-resolution, three-dimensional,
6 animated images of spacecraft, celestial bodies and other objects in the space environment,
7 is utilized. The graphical output is simplified to only a few colors to differentiate only
8 background and irrelevant objects from relevant objects. Differentiation is also made,
9 using different colors, in representation of those portions of the field of view that overlap
10 relevant (obscuring) objects from the remainder of the field of view which is unobscured.
11 By counting pixels of the respective colors, frame-by-frame during animation, the
12 percentage of obscuration over time is quantified.

FIG. 1



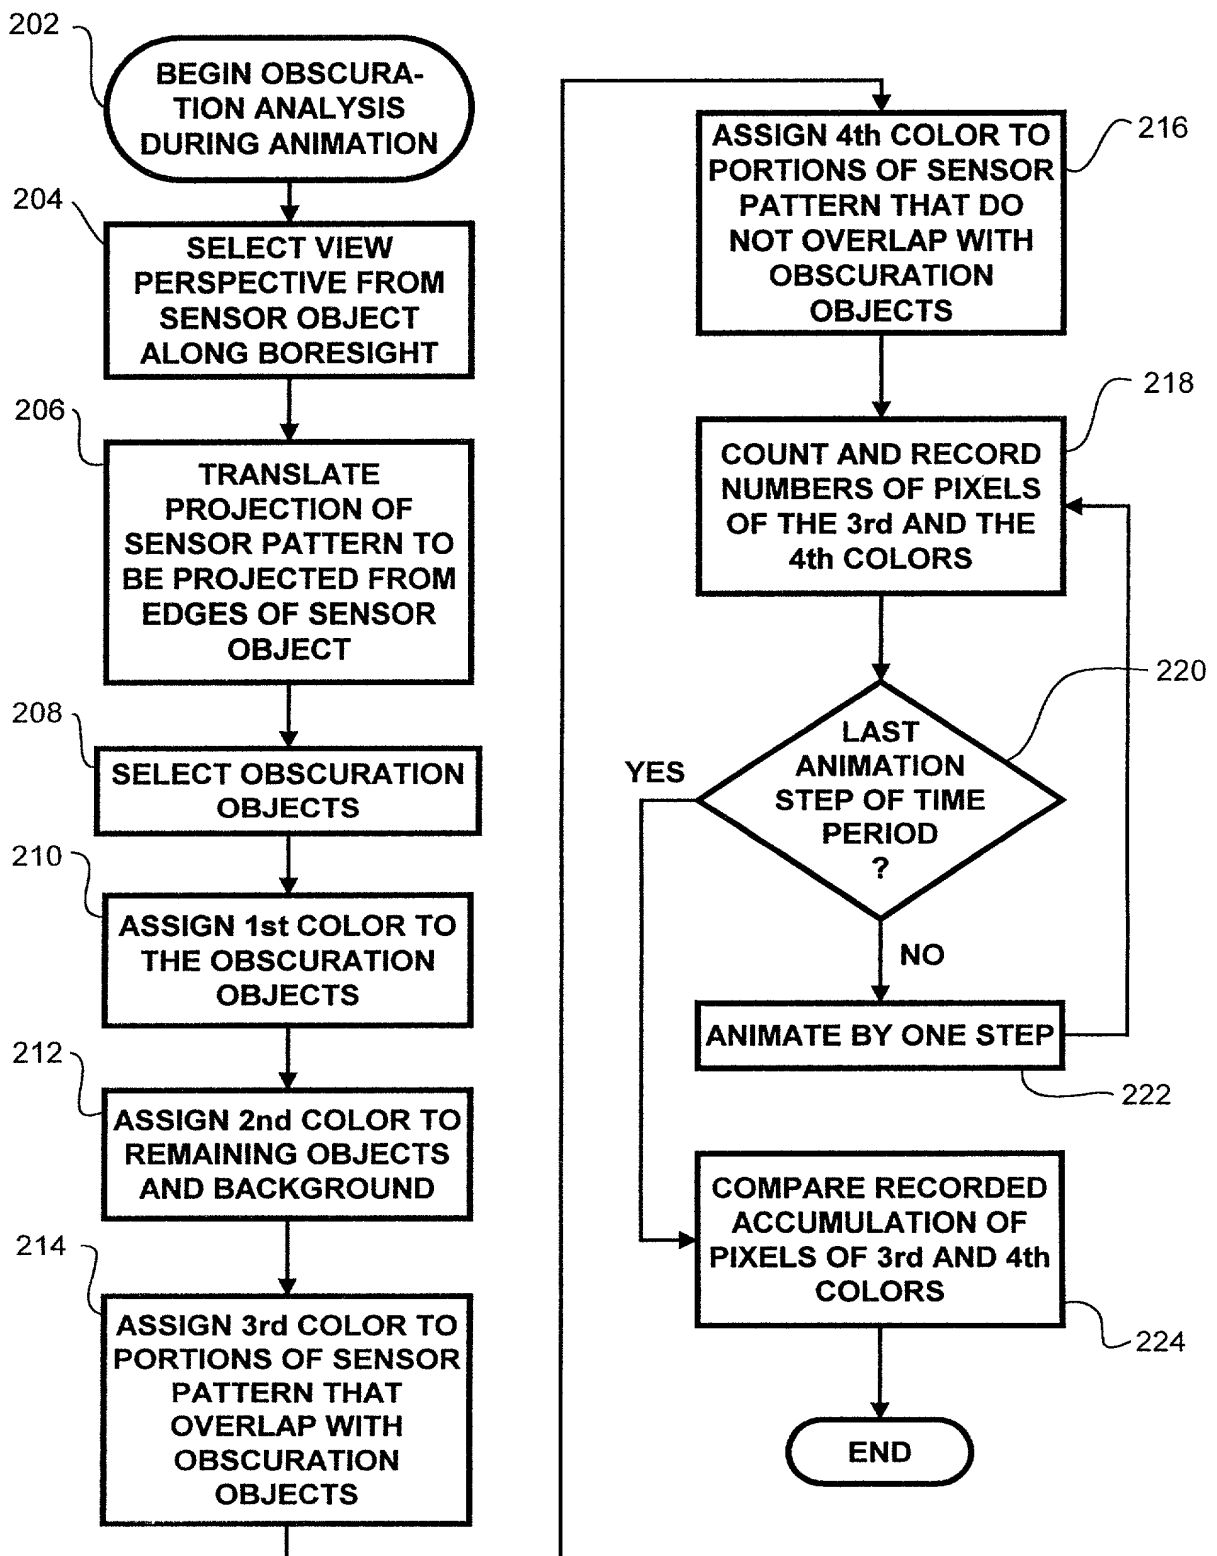


FIG. 2

	1970	1971	1972	1973	1974	1975	1976	1977	1978	1979	1980	1981	1982	1983	1984	1985	1986	1987	1988	1989	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	2101	2102	2103	2104	2105	2106	2107	2108	2109	2110	2111	2112	2113	2114	2115	2116	2117	2118	2119	2120	2121	2122	2123	2124	2125	2126	2127	2128	2129	2130	2131	2132	2133	2134	2135	2136	2137	2138	2139	2140	2141	2142	2143	2144	2145	2146	2147	2148	2149	2150	2151	2152	2153	2154	2155	2156	2157	2158	2159	2160	2161	2162	2163	2164	2165	2166	2167	2168	2169	2170	2171	2172	2173	2174	2175	2176	2177	2178	2179	2180	2181	2182	2183	2184	2185	2186	2187	2188	2189	2190	2191	2192	2193	2194	2195	2196	2197	2198	2199	2200	2201	2202	2203	2204	2205	2206	2207	2208	2209	2210	2211	2212	2213	2214	2215	2216	2217	2218	2219	2220	2221	2222	2223	2224	2225	2226	2227	2228	2229	2230	2231	2232	2233	2234	2235	2236	2237	2238	2239	2240	2241	2242	2243	2244	2245	2246	2247	2248	2249	2250	2251	2252	2253	2254	2255	2256	2257	2258	2259	2260	2261	2262	2263	2264	2265	2266	2267	2268	2269	2270	2271	2272	2273	2274	2275	2276	2277	2278	2279	2280	2281	2282	2283	2284	2285	2286	2287	2288	2289	2290	2291	2292	2293	2294	2295	2296	2297	2298	2299	2300	2301	2302	2303	2304	2305	2306	2307	2308	2309	2310	2311	2312	2313	2314	2315	2316	2317	2318	2319	2320	2321	2322	2323	2324	2325	2326	2327	2328	2329	2330	2331	2332	2333	2334	2335	2336	2337	2338	2339	2340	2341	2342	2343	2344	2345	2346	2347	2348	2349	2350	2351	2352	2353	2354	2355	2356	2357	2358	2359	2360	2361	2362	2363	2364	2365	2366	2367	2368	2369	2370	2371	2372	2373	2374	2375	2376	2377	2378	2379	2380	2381	2382	2383	2384	2385	2386	2387	2388	2389	2390	2391	2392	2393	2394	2395	2396	2397	2398	2399	2400	2401	2402	2403	2404	2405	2406	2407	2408	2409	2410	2411	2412	2413	2414	2415	2416	2417	2418	2419	2420	2421	2422	2
--	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	---

Serial No.: Not yet assigned

Filed: Herewith

For:

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

My residence, post office address and citizenship are as stated below next to my name.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, § 1.56(a).

I hereby appoint the following attorney(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Jon L. Roberts
Registration No. 31,293
John K. Abokhair, Esq.
Registration No. 30,537
Kevin L. Pontius
Registration No. 37,512
Roberts Abokhair & Mardula, L.L.C.
11800 Sunrise Valley Drive
Suite 1000
Reston, Virginia 20191-5302
(703) 391-2900

I declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements are made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of inventor Douglas Claffey


Inventor's Signature  Date 6-10-99

Residence Malvern, Pennsylvania

Post Office Address: 11 Rogers Way
Malvern, PA 19355

Citizenship: USA

Full name of inventor Paul Graziani

Inventor's Signature  Date 6-11-99

Residence Wayne, Pennsylvania

Post Office Address: 661 Timber Drive
Wayne, PA 19087

Citizenship: USA

Full name of inventor Deron Ohlarik

Inventor's Signature  Date 6-10-99

Residence Schwenksville, Pennsylvania

Post Office Address: 107 Bethanna Drive
Schwenksville, PA 19473

Citizenship: USA

664T90-002250